

BTL

SIDE SHIFT FLAIL MOWER - REVERSIBLE



The BTL is the first of the reversible flail mower series, built with high resistance steel.

The machine can side shift (around 40cm) using an hydraulic cylinder, and its mainly used for cutting shrubs, pruning residues, orchards and vineyards too.

The machine can be front or rear mounted, choosing between 540 or 1000rpm gearbox using a double free wheel inside it.

Italian Passion & Technology
Made in Modena



SOVEMA S.r.l.
Via Olmo, 6
41013 Gaggio di Piano (MO) ITALY
Ph. +39 059 93 85 85
Fx. +39 059 93 85 12
E-mail: sovema@sovema.com
Web-site: www.sovema.com

SOVEMA-AGRITAL Cab Factory
Via Leonardo da Vinci, 20
24040 Arzago d'Adda (BG) ITALY
Ph. +39 0363 87 633
Fx. +39 0363 87 355
E-mail: sovema@agritalsovema.com
Web-site: www.agritalsovema.com


SOVEMA Inc.
3089 Bellbrook Center Drive
Memphis, TN 38116 U.S.A.
Ph. 901 388 8869
Fx. 901 388 8348
E-mail: sovema@sovemausa.com
Web-site: www.sovemausa.com

SOVEMA CANADA Ltd.
4845 Portage Avenue
Headingley, MB R4H 1C7 CANADA
Ph. 204 927 9042
Fx. 204 897 6975
E-mail: sovema@sovemaCanada.com
Web-site: www.sovemaCanada.com

STANDARD FEATURES FOR BTL

Mainly used for cutting shrubs, pruning residues, orchards and vineyards.

- Double linkage: rear and front
- Double input gearbox
- Double free wheel into gearbox
- Rear roller (standard)
- Hydraulic side shift
- For tractor up to 80 HP max
- Category I and II hitch
- Front protective flaps
- Choice of knives
- 540 or 1000 RPM PTO
- No.3 transmission belts
- Automatic linkage hitch
- Reinforced frame
- Rotor with self-balancing knives supports
- In house Sovema gearbox production

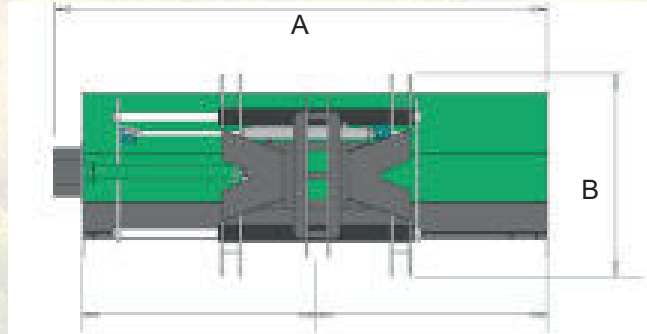

Model	A	B	H	Side Shift	
	(cm-inches)	(cm-inches)	(cm-inches)	right (cm-inches)	left (cm-inches)
BTL 140	165 - 65"	114 - 45"	110 - 43"	81 - 32" 41 - 16"	62 - 24" 102 - 40"
BTL 160	185 - 73"	114 - 45"	110 - 43"	81 - 32" 41 - 16"	82 - 32" 122 - 48"
BTL 180	205 - 82"	114 - 45"	110 - 43"	81 - 32" 41 - 16"	102 - 40" 142 - 56"
BTL 200	225 - 90"	114 - 45"	110 - 43"	81 - 32" 41 - 16"	120 - 47" 160 - 63"

Model	Working Width (cm-inches)	Weight (Kg-Lbs)	HP	Rotor 540/1000(rpm)	Knives				
					48	24	24	12	24
BTL 140	140 - 56"	540 - 1191	30- 80	1845/1950	48	24	24	12	24
BTL 160	160 - 64"	570 - 1257	35- 80	1845/1950	48	24	24	16	32
BTL 180	180 - 72"	600 - 1323	40- 80	1845/1950	56	28	28	16	32
BTL 200	200 - 80"	630 - 1389	45- 80	1845/1950	80	40	40	20	40

Technical data are subject to change and not binding



Distributed by:

Your local Dealer: